



Mex[®] FIX-C1

TECHNICAL DATA SHEET

Mex-Fix C1, made from martensitic stainless steel C1, is a screw specifically developed for fastening facade profiles to wooden substructures.

The screw features a rounded head, milling and driving threads, a specially designed tip, a Torx profile, and many other advantages.

Description and Benefits of the Mex-Fix C1


TORX PROFILE: Transmits greater torque

SCREW SHAFT: Reduces friction and installation torque, increases resistance to breakage, and ensures efficient power transmission

MARTENSITIC STAINLESS STEEL C1: High-strength steel with good mechanical resistance. It is corrosion-resistant in less aggressive environments and withstands typical weather conditions excellently

+ PASSIVATION PROTECTION: Enhances corrosion resistance

SUITABLE USE: Ideal for mounting facade profiles to wooden substructures and outdoor furniture in mild outdoor conditions. Best used with wood types with low tannin content, providing long service life and reliable performance

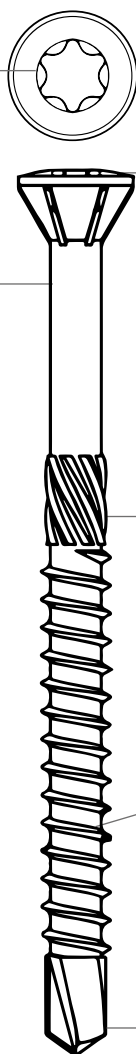

ROUNDED HEAD: The smaller rounded head ensures an aesthetically pleasing, unobtrusive appearance when countersunk into wood

MILLING THREAD: Reduces friction and resistance during screwing, minimizes the risk of wood splitting, effectively removes chips, and ensures a firm hold of the screw in the material

DRIVING THREAD: Allows quick screwing of facade profiles to wooden substructures

TIP: Equipped with a special „drill“ for more efficient screwing

Material Description – Stainless Steel C1

- ✓ Suitable for softwood species and woods with low tannin content, such as pine, spruce, larch, etc.
- ✓ **Surface treatment by passivation** increases corrosion protection
- ✓ **High durability:** C1 is martensitic stainless steel, hardened, and has 50% higher breakaway torque than austenitic stainless steel A2 and A4
- ✓ **Limited corrosion resistance:** Stainless steel C1 is not suitable for use in aggressive environments, such as areas with high salt or chlorine content
- ✓ Magnetic properties



SOFTWOOD
APPLICATIONS



HIGH STRENGTH
OF THE SCREW



CLADDING
APPLICATIONS



MAGNETIC PROPERTIES
OF THE SCREW



Mex-Fix C1 is intended for:



Softwood species

- ✓ Spruce
- ✓ Siberian Larch*
- ✓ Silesian Larch*
- ✓ Pine (with and without pressure treatment)

Note: This recommendation may not apply to all usage scenarios. The properties and lifespan of the screw can be influenced by specific environmental conditions. Therefore, we recommend consulting with your dealer.

** It is possible to use, but we recommend consulting with your dealer.*

Cladding Screw Offer

Art. No.	Screw Name	Size	Torx	Packaging
440C1FIX	Mex-Fix-C1	4,0x40 mm	TX15	200 pcs
450C1FIX	Mex-Fix-C1	4,0x50 mm	TX15	200 pcs
460C1FIX	Mex-Fix-C1	4,0x60 mm	TX15	200 pcs
4550C1FIX	Mex-Fix-C1	4,5x50 mm	TX20	200 pcs
4560C1FIX	Mex-Fix-C1	4,5x60 mm	TX20	200 pcs
4570C1FIX	Mex-Fix-C1	4,5x70 mm	TX20	200 pcs
545C1FIX	Mex-Fix-C1	5,0x45 mm	TX20	200 pcs
550C1FIX	Mex-Fix-C1	5,0x50 mm	TX20	200 pcs
560C1FIX	Mex-Fix-C1	5,0x60 mm	TX20	200 pcs
570C1FIX	Mex-Fix-C1	5,0x70 mm	TX20	200 pcs
580C1FIX	Mex-Fix-C1	5,0x80 mm	TX20	200 pcs


Assessment of screw properties

Product	Characteristic yield moment $M_{y,k}$ [Nmm]	Characteristic withdrawal parameter $f_{ax,k}$ [N/mm²]		Characteristic head pull-through parameter $f_{head,k}$ [N/mm²]	Characteristic tensile capacity $f_{tens,k}$ [kN]x	Characteristic torsional ratio
		perpendicular to the grain	parallel to the grain			
Mex-Fix-C1 ø 4,5 mm	4,626	16,47	13,20	22,75	6,97	3,86
Characteristic density of wood [kg/m³]	–	350		350	–	450
Durability (i.e. corrosion protection)	Stainless steel SS 410 (Service class 3 acc. to EN 1995-1-1)					

During installation, it is recommended to pre-drill holes for the screws to ensure accuracy and reduce the risk of material damage.



With Pre-drilling



Without Pre-drilling